

KANATOL - 8S

DI OCTYL SEBACATE (DOS)


Primary plasticizer for PVC and PVC copolymers

Chemical Nature Sebacic acid ester of C₈alcohol

Chemical Name :- Di (2-Ethylhexyl) Sebacate

Trade Name :- DOS , DÉHS Molecular Formula :- $C_{26}H_{50}O_4$ Molecular Weight :- 426

Molecular Structure :- $(CH_2)_8(COOC_8H_{17})_2$

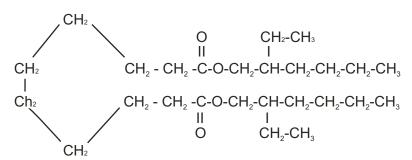

CAS Number :- 122-62-3, 131170-17-7 , 28986-40-5

UN. NO :-

EINECS NO :- 204-558-8

Specification Characteristics Unit Test Method Value

Colour Volatile Loss (130°C/3Hrs) Ester Value Acidity Moisture Specific Gravity (27°C) Ester content Heat Stability (180°C/2Hrs) Acidity after heat treatment	HU wt.% mg KOH/g wt.% wt.% - wt.% HU wt.%	ASTM-D-1045-86 KLJTM ASTM-D-1045-86 ASTM-D-1045-86 ASTM-E-203 ASTM-D-1045-86 ASTM-D-1045-86 ISI-9591-96 ASTM-D-1045-86	40 max. 0.20 max. 260-266 0.02 max. 0.10 max. 0.910-0.920 99.50 min. No Change 0.03
Plasticizing Esters by GC	%by area	KLJTM	99.00 min.

Typical Properties

Boiling Point @ 7 mbar	°C	lit.	248.
Viscosity at 20°C	ср	KLJTM	59-63
Flash Point	°Č	KLJTM	215
Refractive Index (27°C)		ASTM-D-1045-86	1.442-1.4452

Total Solution in Plasticizers

Contact: plasticizer@kljindia.com An ISO 9001:2000 and ISO 14001:2004 conglomerate

www. kljindia.com





KANATOL - 8S

Properties DOS is almost colourless and oily liquid, free of foreign materials.

Application

Dioctyl Sebacate is a plasticizer for PVC, and its copolymers, nitrocelluloses, styrene resins and synthetic rubbers where low temperature performance is required. The end applications include anti-frosting cable and PVC linoleum.

Plasticizing Efficiency 1.09

Packing & Storage DOS is packed in 200/225 kg iron drum / HDPE drum, 20 - 22 MT in Flexi

tank / ISO tank / road tanker. It is stored in tightly closed container, in a cool,

dry & ventilated area.

Shelf Life Original characteristics remain intact for 24 months, if kept in recommended

storage.

Safety The MSDS can be provided on request.

Disclaimer The data contained in this publication are based on our current knowledge and

experience. During processing, there are so many factors which may affect the application part of **DOS**, so these data neither imply any guarantee of certain properties, nor the suitability of the product for the specific purpose. Any data given in this publication may change without prior information and do not

constitute the agreed quality of our product.

Total Solution in Plasticizers

Contact: plasticizer@kljindia.com

An ISO 9001:2000 and ISO 14001:2004 conglomerate

www. kljindia.com