




DI – n-BUTYL PHTHALATE (DnBP)

DI-n-BUTYL PHTHALATE (DnBP)

Primary plasticizer for PVC and PVC copolymers

Chemical Nature

Phthalic acid ester of Normal butyl alcohol
 Chemical Name :- DI-n-Butyl Phthalate
 Trade Name :- DNBP
 Molecular Formula :- C₁₆H₂₂O₄
 Molecular Weight :- 278
 Molecular Structure :- C₆H₄(CO₂ C₄H₉)₂

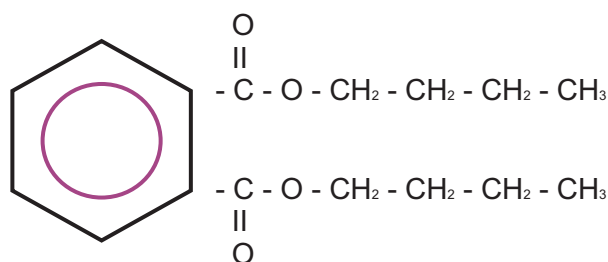

CAS Number :- 84-74-2
 UN. NO :- 3082
 EINECS NO :- 201-557-4

Specification

Characteristics

Unit

Test Method

Value

Colour	HU	ASTM-D-1045-86	20 max.
Volatile Loss (110°C/2Hrs)	wt. %	KLJTM	0.10max.
Ester Value	mg KOH/g	ASTM-D-1045-86	401-405
Acidity	wt. %	ASTM-D-1045-86	0.010 max.
Moisture	wt. %	ASTM-E-203	0.10 max.
Specific Gravity (27°C)	-	ASTM-D-1045-86	1.041 – 1.045
Ester content	wt. %	ASTM-D-1045-86	99.50min.
Heat Stability (150°C/2Hrs)	HU	ISI-9591-96	No Change
Acidity after heat treatment	wt. %	ASTM-D-1045-86	0.03
Plasticizing Esters by GC	%by area	KLJTM	99.50min.
Residual alcohol	%by area	KLJTM	0.05 max..

Typical Properties

Boiling Point @ 1.013 hpa	°C	lit.	340
Pour point	°C	lit.	- 69
Viscosity at 20°C	cp	KLJTM	21 ± 2
Flash Point	°C	KLJTM	168
Refractive Index (27°C)	--	ASTM-D-1045-86	1.490 – 1.492

Total Solution in Plasticizers



DI – n-BUTYL PHTHALATE (DnBP)

Properties

DBP is almost colourless, odourless or slight aromatic, ester odour oily liquid, free of foreign materials.

Application

Plasticization of vinyl resins and other kinds of polymers in production of cable flexible PVC, artificial leather, rubber products, polymeric building materials, linoleum, film and sheet /plate materials, packing films, PVC gaskets etc.

Used primarily as a plasticizer for nitrocellulose, polyvinyl acetate and polyvinyl Chloride.

Used in platisol formulation for carpet back coating and other vinyl compounds in the manufacture of various paints, varnishes and lacquers, medical supplies ,safety glass for automobiles, cosmetics, such as nail polishes and paper coating, textile lubricant agent, insect repellent for impregnation of clothing, concrete additive, solvent for perfume oils, perfume fixative, stabilizer in rocket propellants , in adhesive, in printing inks, footwear, Hose pipes

Packing & Storage

DnBP is packed in 200/225 kg iron drum / HDPE drum, 20 - 22 MT in Flexi tank / ISO tank / road tanker. It is stored in tightly closed container, in a cool, dry, ventilated area.

Shelf Life

Original characteristics remain intact for 24 months, if kept in recommended storage.

Safety

The MSDS can be provided on request.

Disclaimer

The data contained in this publication are based on our current knowledge and experience. During processing, there are so many factors which may affect the application part of DnBP, so these data neither imply any guarantee of certain properties, nor the suitability of the product for the specific purpose. Any data given in this publication may change without prior information and donot constitute the agreed quality of our product.